

THE OHAUS CHAMP™ II

bench scales




Designed to be the perfect solution for your general purpose weighing requirements, Ohaus Champ II Bench Scales are ready to go to work for you. Champ II scales are capable and easy to operate. Functional design and robust construction guarantees durability and reliability. The Ohaus Champ II is an exceptional value providing accuracy, features and performance in an industrial bench scale.

- Parts counting mode – Great for shipping and inventory control
- Plug and Play – Ready to weigh
- 7 Models to choose from – 15 kg to 300 kg (30 lb to 600 lb)
- AC and DC power
- RS232 data interface
- 5-year warranty



The Ohaus Champ™ II

Bench Scales

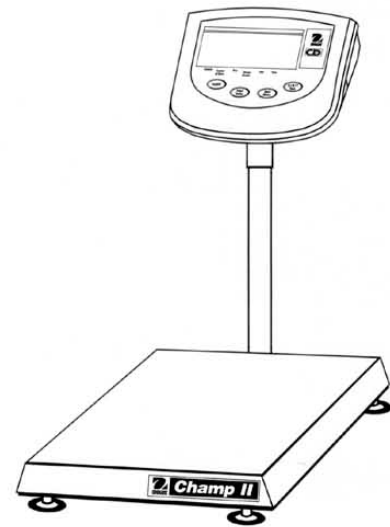

Model	CH15R11	CH30R11	CH60R11	CH60L11	CH100R11	CH150R11	CH300R11
Capacity x Readability (kg)*	15 x 0.002	30 x 0.005	60 x 0.01	60 x 0.01	100 x 0.02	150 x 0.02	300 x 0.05
Capacity x Readability (lb)*	30 x 0.005	60 x 0.01	120 x 0.02	120 x 0.02	200 x 0.05	300 x 0.05	600 x 0.1
Non LFT Resolution	1 : 7500	1 : 6000	1 : 6000	1 : 6000	1 : 5000	1 : 7500	1 : 6000
NTEP Resolution	1 : 3000	1 : 3000	1 : 3000	1 : 3000	1 : 2500	1 : 3000	1 : 3000
Base Size (in/cm)	12 x 14 x 3.7 / 30.5 x 35.5 x 9.5			16x20x4.1/40x50x10.5		17 x 22 x 5 / 42 x 55 x 12.5	
Platform Construction	Stainless steel 304						
Frame Structure	Black polyurethane painted steel						
Column Construction	Stainless steel						
Column Height (in/cm)	14 / 35			27 / 68 cm			
Scale Weight (lb/kg)	24 / 11			49 / 22		55 / 25	
Shipping Weight (lb/kg)	30 / 14			57 / 26		70 / 31	
Display (in/cm)	LCD 1 inch / 2.54 cm						
Keyboard	4-function membrane switches						
Power	9 VDC / 500 mA AC adapter or six alkaline C - type batteries						
Typical Battery Life	250 hours in battery save mode/100 hours continuous use						
Weighing units	g, kg, lb						
Modes	Weighing & parts counting						
Zeroing Range	2%, 18% or 100% capacity						
Span Calibration	10% to 100 %						
Operating Temperature	- 10° C to 40° C						
Storage Temperature	- 20° C to 60° C						
Item Ordering Number	CH15R11	CH30R11	CH60R11	CH60L11	CH100R11	CH150R11	CH300R11

*Listed readability is non LFT factory setup. NTEP approvals pending.

**Model CH100R11 is factory calibrated for 100kg. Max. capacity is 150 kg. User selectable calibration is 150kg x 0.002

Meets Requirements of Approval Agencies: UL, FCC, CSA, CE Safety EN60950, Emissions EN55022, Immunity EN50082-1



Standard Features

RS232 bi-directional interface, Net/Gross/Tare function, Auto-off timer. The platform features leveling feet, leveling bubble, rugged steel construction, IP65 load cell, AC adapter.

Warranty

All Ohaus Champ II Bench Scales are protected by a 5-year warranty on labor and parts. Our rugged construction and stringent quality control have been hallmarks of Ohaus scales and balances since 1907.

Solid Service Support

Should service or repair ever be required, we will perform the necessary work promptly at reasonable rates. In the U.S., use our service hotline (800) 526-0659.

Simple To Order

If you would like an Ohaus specialist to assist you in selecting the balance or scale exactly right for you, simply call, in the U.S., (800) 672-7722... then place your order with the dealer of your choice.

Ohaus Corporation

29 Hanover Road
Florham Park, NJ 07932 USA
Tel: 1-800-672-7722
973-377-9000
Fax: 973-593-0359

With offices in Mexico, Switzerland, England, Germany, France, Spain, Italy, Poland, Japan, Korea and China

ISO 9001

Registered Quality Management System

Internet Address: www.ohaus.com

5 Year Warranty

LUS09-99 © Copyright Ohaus Corporation

